


Concrete pump


Output up to 92 m³/h
Delivery pressure up to 106 bar

BSA 1405 -E
BSA 1408 -E
BSA 1409 -D
BSA 1409 -E

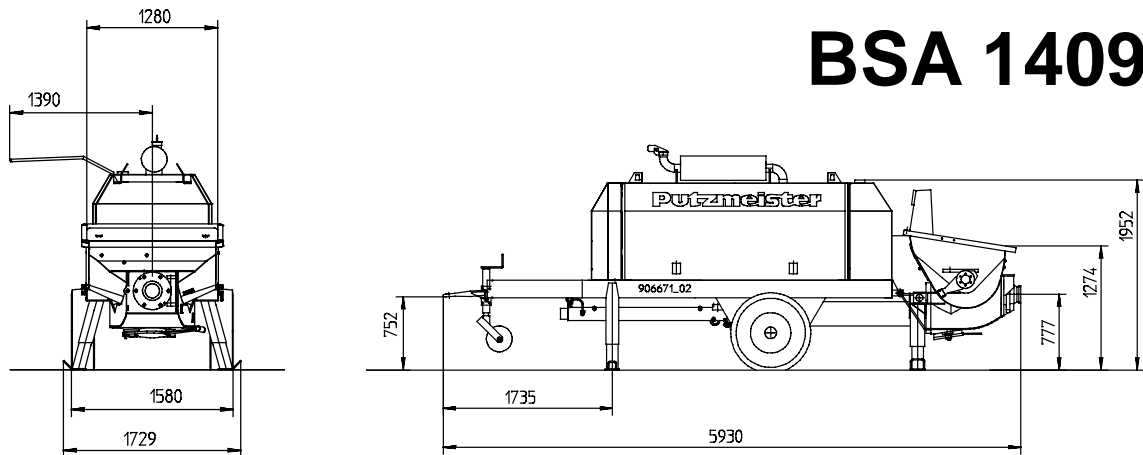

Note: Standard version. Dimensions and weights depend on equipment.

Performance diagram

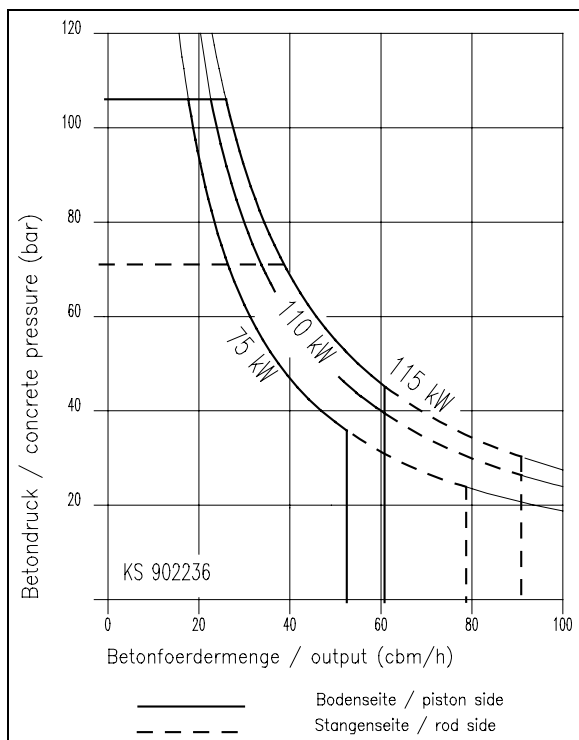

Technical data for concrete pump

Model	BSA	1405 -E	1408 -E	1409 -D	1409 -E
Material number		101134.008	101135.007	101112.004	101136.006
Output	m ³ /h	55 / 37 *	79 / 53 *	91 / 61 *	92 / 62 *
Delivery pressure	bar	71 / 106 *			
Delivery cylinder	∅ mm	200 mm			
Delivery cyl. stroke	mm	1400 mm			
Strokes / minute		21 / 14 *	30 / 20 *	35 / 23 *	35 / 24 *
Engine / motor power	kw	75 **		115	110 **
Hopper		RS 900			
Capacity	l	400			
Filling height	m	approx. 1.3			
Transfer tube		S 2015 D			
Pressure connection		6"			
Control system		Free-Flow Hydraulics (FFH)			
Weight	kg	4200	4600	4400	


* Values for hydraulic fluid being fed to piston-side.

** Electric motor with 50 Hz.

All data maximum theoretical.

Alterations due to technical progress reserved.
Please see quotation for exact serial delivery scope.

Site example: BSA and stationary boom

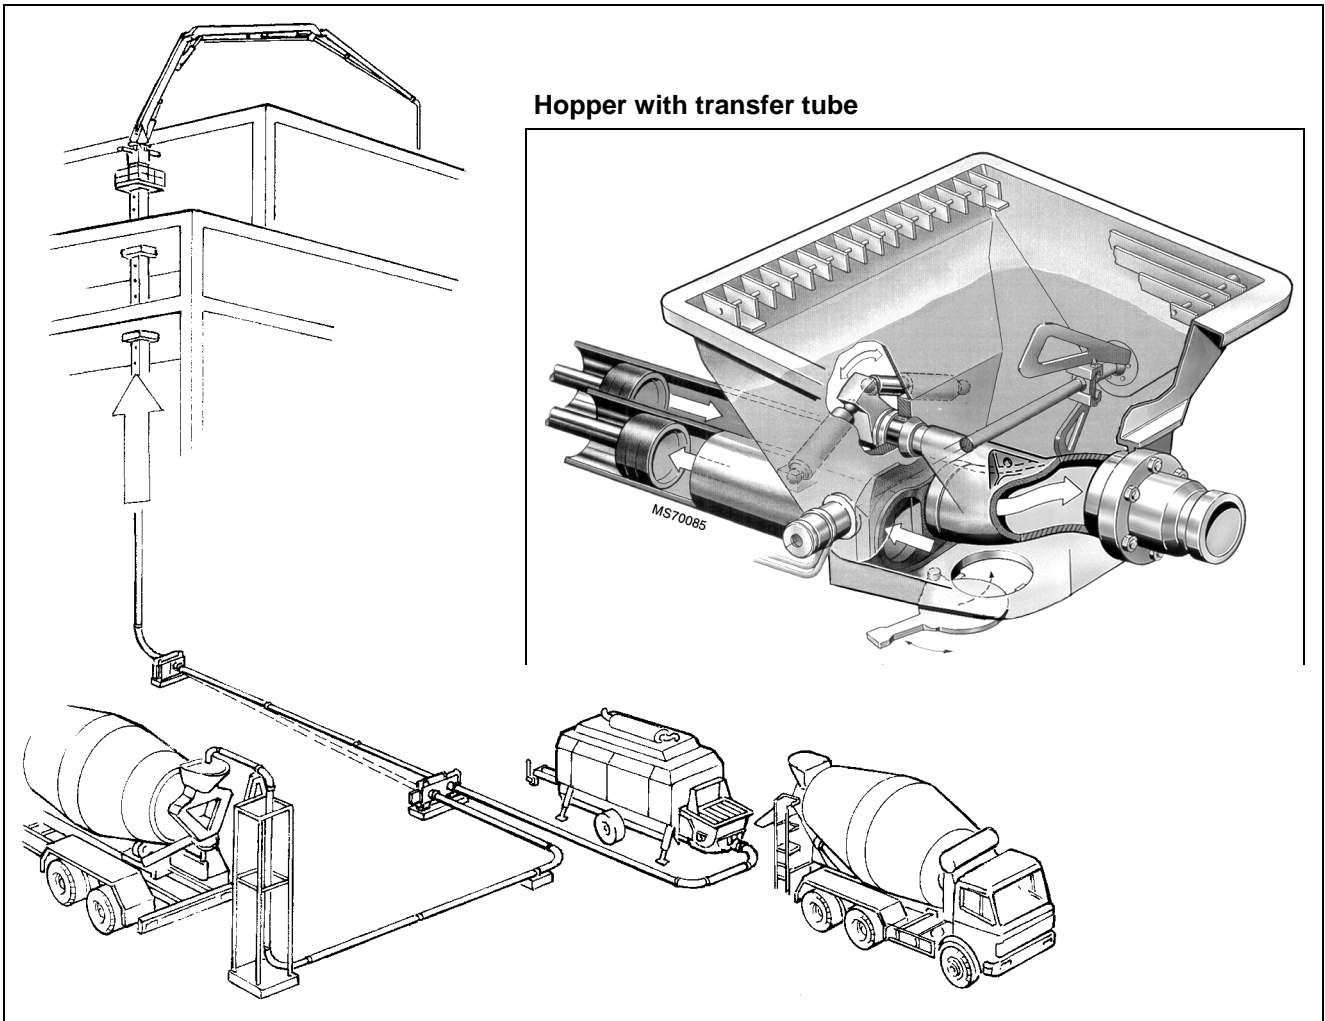

Delivery scope

- cast wear parts, highly wear resistant
- CE-Kit with agitator safety switch off
- central lubrication strip hopper
- cleaning accessories
- concrete hopper with agitator
- coupling ring (DIN)
- drive electric 75 KW (BSA 1405 -E, BSA 1408 -E)
- drive diesel, Deutz 115 KW (BSA 1409 -D)
- drive electric 110 KW (BSA 1409 -E)
- grill 70 mm
- operating manuals 2x cert. and spare part lists
- painting: MB 1227 chrome yellow
- remote control with 5m cable
- set of tools
- side flaps 2x
- splash guard
- square outriggers 4x mech. 15°-slanging
- support wheel on towbar
- trailer F 8, can be driven on job site
- transport protection on support wheel

Optional extras

On request